



DOOR OPERATOR LEGEND		
TAG	DESCRIPTION	COLOR
LT1	POWER ON	GREEN
LT2	HEATER ENABLED	GREEN
LT3	OVERTEMP TRIP	RED
LT4	HEAT SINK OVERTEMP	RED
LT6	INTERLOCK TRIP	RED
LT9	REMOTE SHUTDOWN	RED
LT12	COMMON ALARM	RED
SS1	HEATER DISABLE/ENABLE	WHITE
PB1	EMERGENCY STOP	RED
ILPB1	GROUND FAULT TRIP/RESET	RED
ILPB2	PHASE LOSS TRIP/RESET	RED

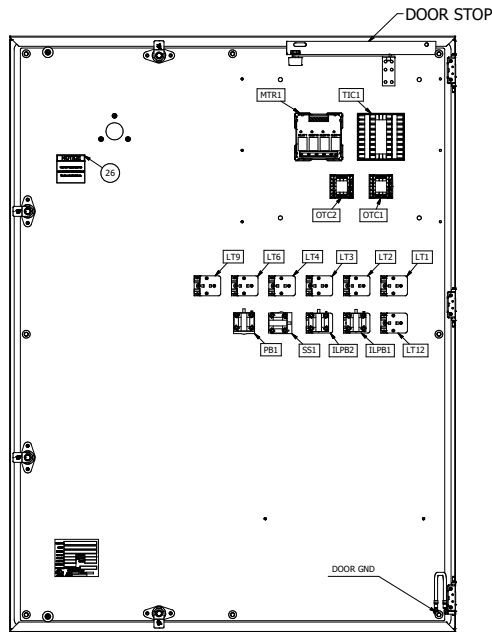


INTERIOR DOOR
SCALE 1/5

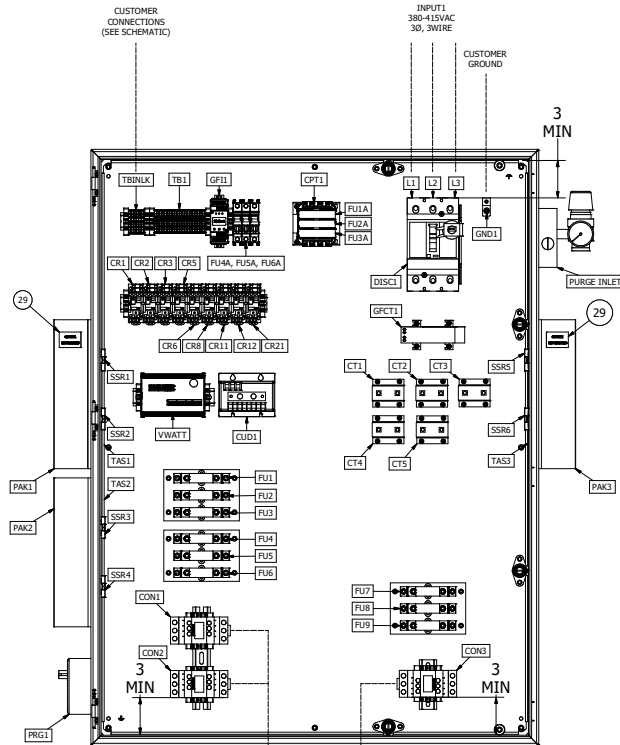

OUTPUT1-2
MAX: 415VAC, 51A
33.3KW NOM, 36.7KW MAX

OUTPUT3
MAX: 415VAC, 51A
33.3KW NOM, 36.7KW MAX

SUB PANEL
SCALE 1 / 5

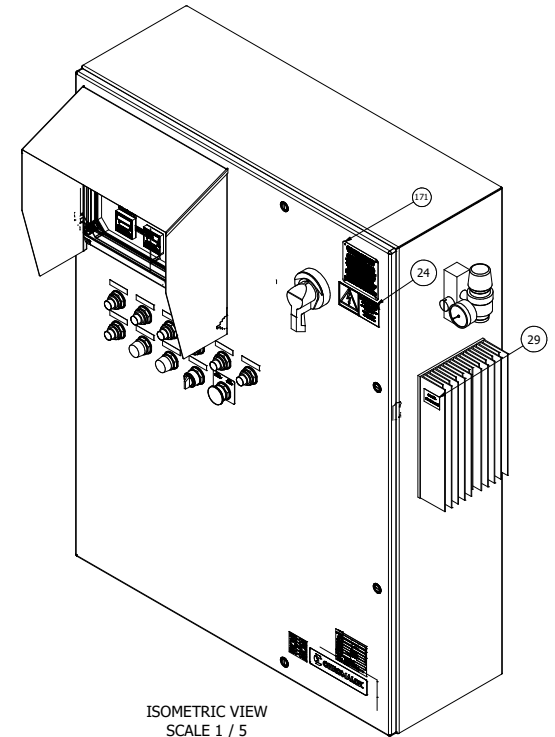

SAFETY AND NOTICE LABELS			
ITEM	QTY	PART NUMBER	MESSAGE
24	1	0027-02234	DANGER, HAZARDOUS VOLTAGE ENCLOSED. CONTACT WILL CAUSE ELECTRICAL SHOCK OR BURN. ISOLATE ALL SOURCES OF POWER BEFORE REMOVING THIS COVER.
26	1	P027-02239	MAXIMUM LOAD SHOULD NOT EXCEED 80% OF RATED CAPACITY OF FUSES OR CIRCUIT BREAKERS.
29	2	0027-01280	CAUTION HOT SURFACES
171	1	PURGE	PURGE LABEL

PROJECTION	SYMBOL	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		CONTRACT NO	
3RD ANGLE		FRACTIONS	DECIMALS	APPROVALS	DATE
MODEL NO.	PC1515-50-PURGE 400 3 IP 100W			DWN	BVD 04-JUN-2026
EQUIP.	POWER CONTROL SYSTEM			CHS	
PART NO.	471001435			ENGR	
DIAG NO.	471001435				
VOLTAGE	380-415	SEC(R)A(N)	5		
PHASE/Hz	3/50-60	ENC TYPE	4/TP66		
PANEL FLA	153	SERIAL			
MOTOR FLA	N/A	DATE			
YEAR/PLACE OF MANUFACTURE					
HAZARDOUS LOCATION					
CLASS	1	DIVISION	2		
GROUPS	A,B,C,D				

Chromalox® Lavergne, Tennessee
www.chromalox.com

EQUIPMENT: POWER CONTROL SYSTEM
VOLTS: 380-415
PHASE/Hz: 3/50-60
AMPS: 153
KW: 100
CUSTOMER: CONSTRUCCIONES Y SERVICIOS
PO NO: 500005681

DRAWING NO
471001435-2 0

REV

3D MODEL ☒ SCALE 1 / 5 DO NOT SCALE DRAWING SHEET 2 OF 4

Firmado digitalmente
por Raul Torres Vega
Fecha: 2026.07.08
08:49:18 -04'00'